



ジェイダブルシステム
JW-system co.,ltd.

Light efficiency:

100 Lumen/Watt

Light quality:

CRI: 91.2

Color temperature:

2955 K



Output: 945 lm

Peak: 240 cd

Power: 9.5 W

24.0V @ 0.395A

12 PLANES

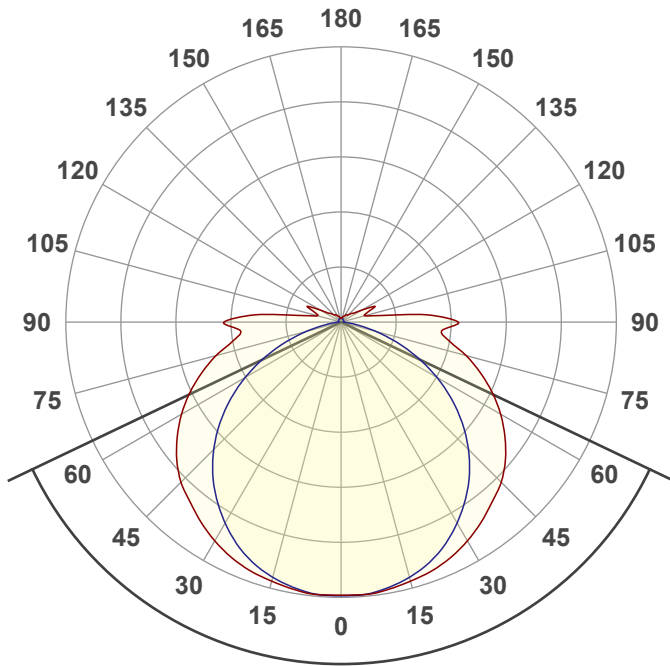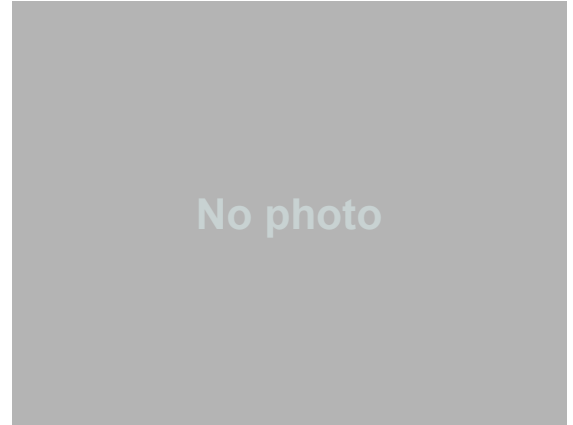

Beam angle


129°



Color




CIE1931
x: 0.444
y: 0.412

Spectra

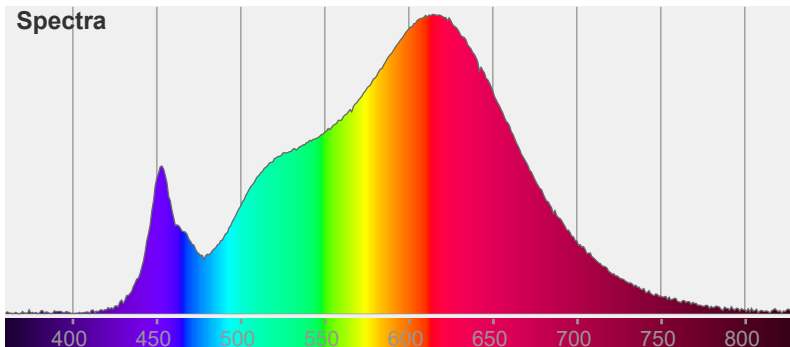


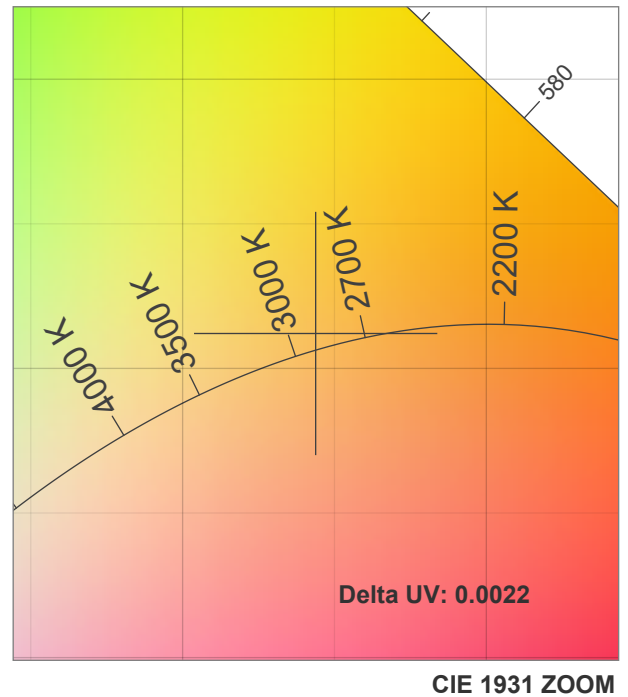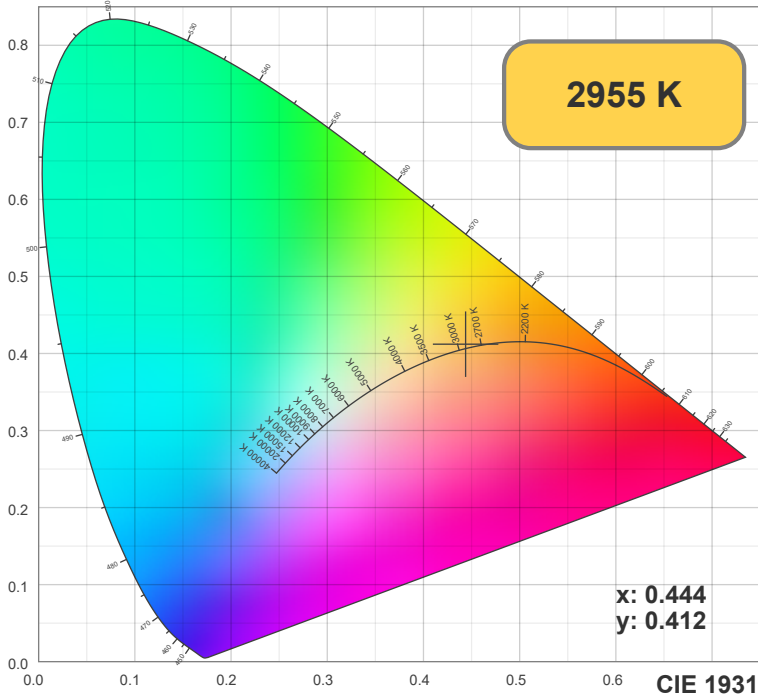

TM30: 90.7

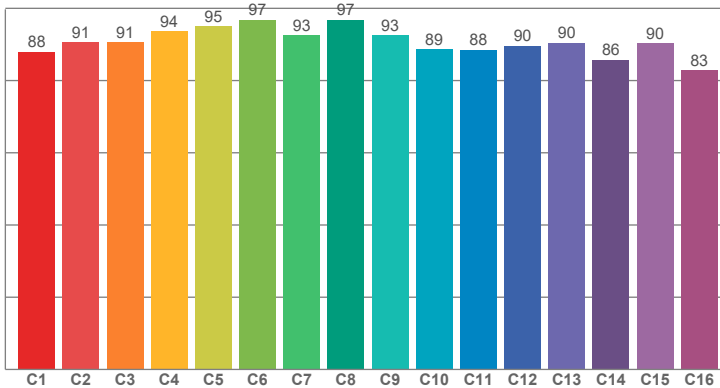

CRI: 91.2 (R1-R8)

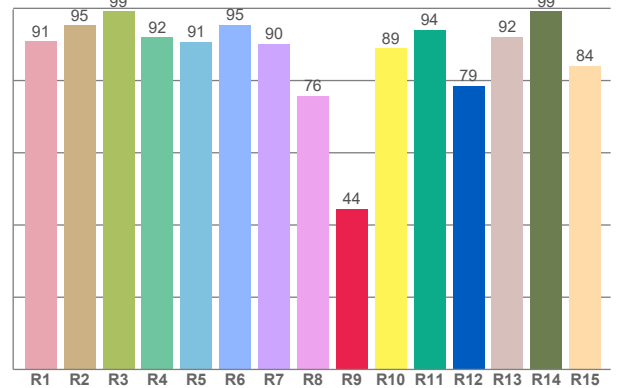

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
90.91	95.27	99.23	91.98	90.77	95.41	90.13	75.79	44.46	88.91	94.11	78.56	92.15	99.19	84.04


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
87.93	90.61	90.61	93.67	95.05	96.80	92.55	96.78	92.55	88.65	88.45	89.57	90.42	85.73	90.32	82.82

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
85.16	94.87	90.09	89.28	91.31	92.14	92.62	93.82	96.53	94.39	93.54	92.86	91.69	82.58	83.70

CQS: 89.9

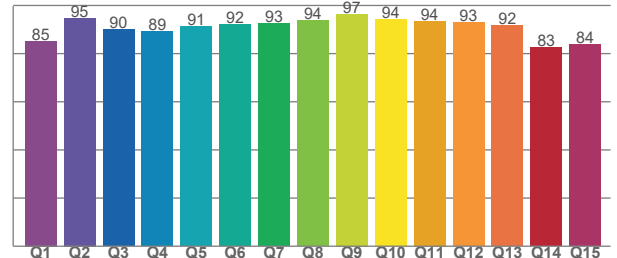

Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
2955 K	91.2	44.5	90.7	96.9	89.9	0.4	0.4	0.3	0.4	0.0022

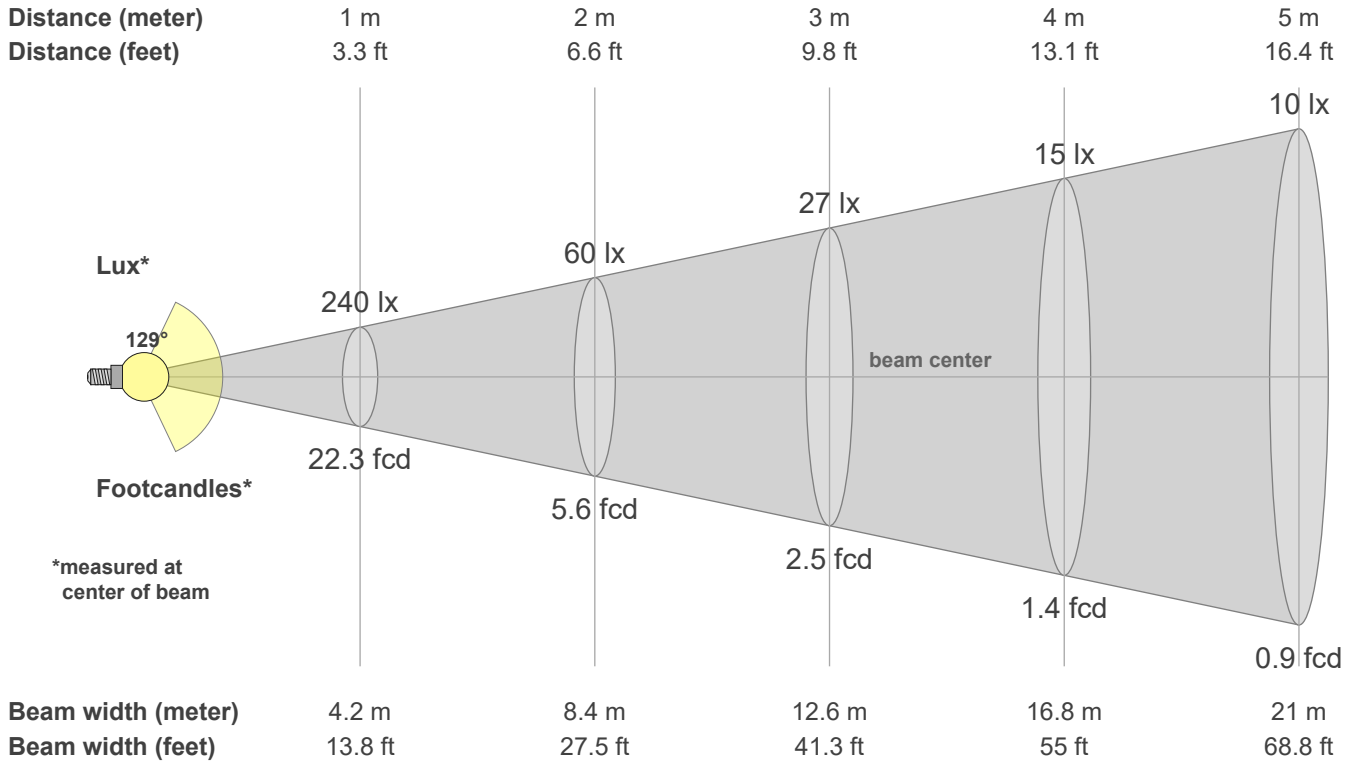

Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
240	238	233	224	212	198	177	152	123	95	102	41	23	28	13	9	8	6	5	4
100%	99%	97%	94%	88%	83%	74%	63%	51%	39%	43%	17%	10%	12%	6%	4%	3%	2%	2%	2%

Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
240	236	227	210	186	157	122	83	44	13	3	2	2	3	3	3	3	3	3	3
100%	99%	95%	88%	78%	66%	51%	35%	18%	5%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%

Intensities in 180° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
240	238	233	224	212	198	177	152	123	95	102	41	23	28	13	9	8	6	5	4
100%	99%	97%	94%	88%	83%	74%	63%	51%	39%	43%	17%	10%	12%	6%	4%	3%	2%	2%	2%

Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
240	236	227	210	186	157	122	83	44	13	3	2	2	3	3	3	3	3	3	3
100%	99%	95%	88%	78%	66%	51%	35%	18%	5%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2.5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
129.0°	200.5°	262.4°	62.8%	41.2%