



ジェイダブルシステム
JW-system co.,ltd.

Light efficiency:

76 Lumen/Watt

Light quality:

CRI: 0

Color temperature:

0 K



Output: 727 lm

Peak: 189 cd

Power: 9.6 W

24.0V @ 0.398A

12 PLANES

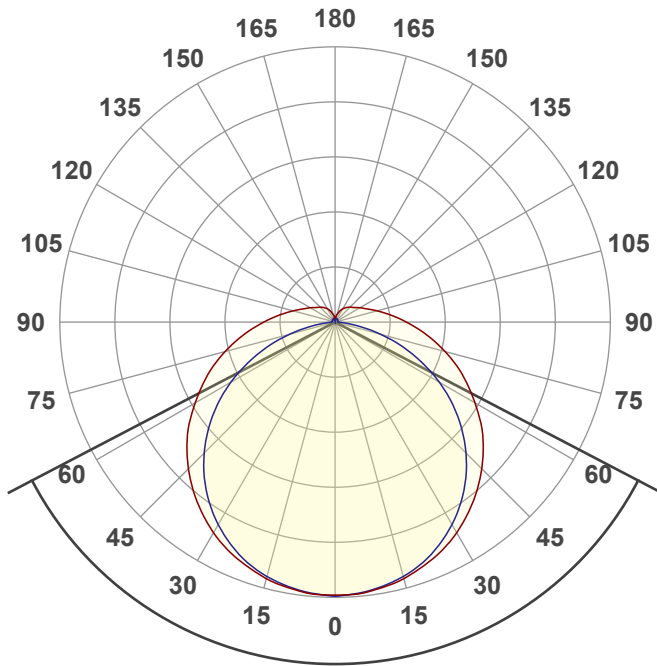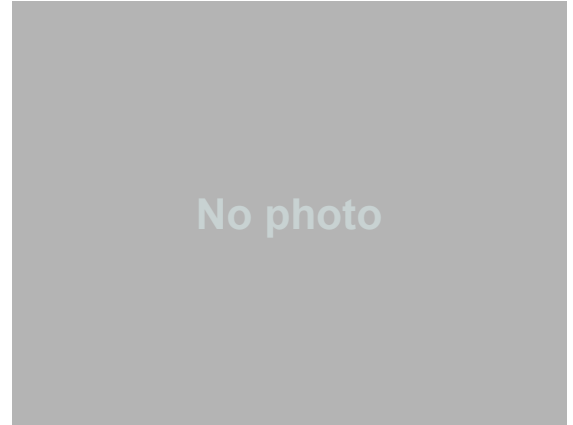

Beam angle


124.8°


Color




CIE1931
x: 0.166
y: 0.730

Spectra

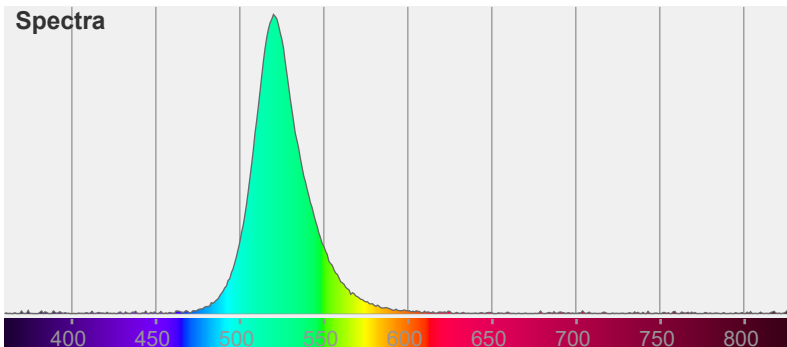

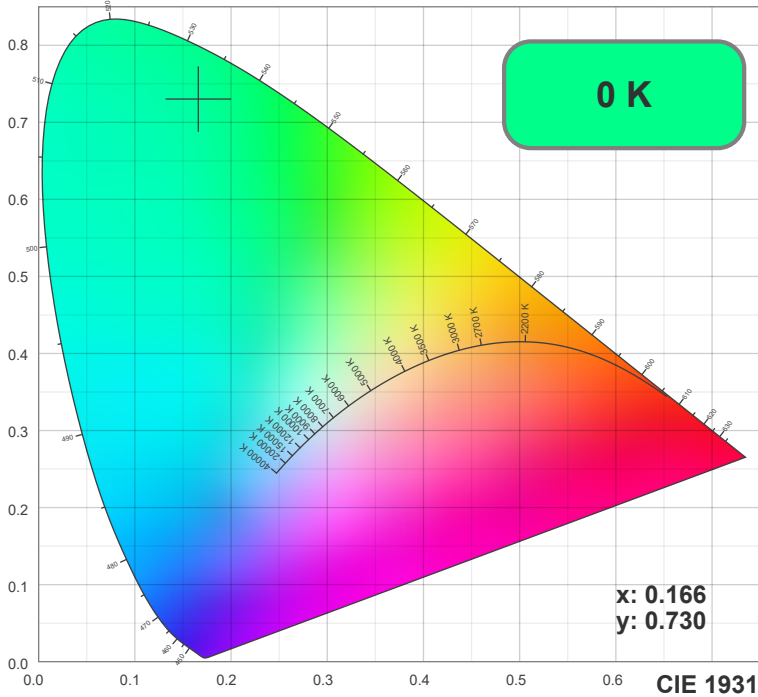

TM30: 0.0

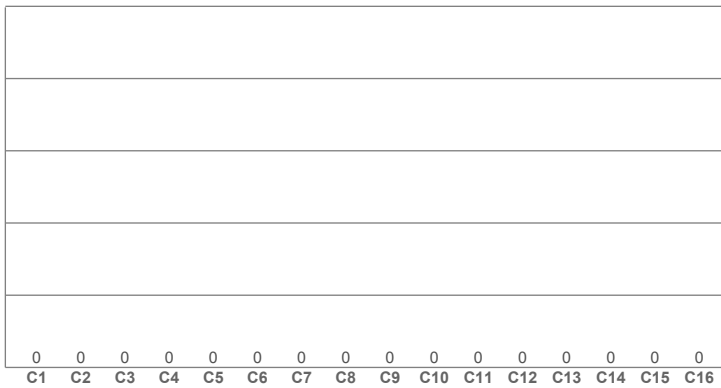

CRI R values, only R1-R8 are used to calculate final CRI value


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

TM30 C values, 16 binned values out of total of 99 C values


C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

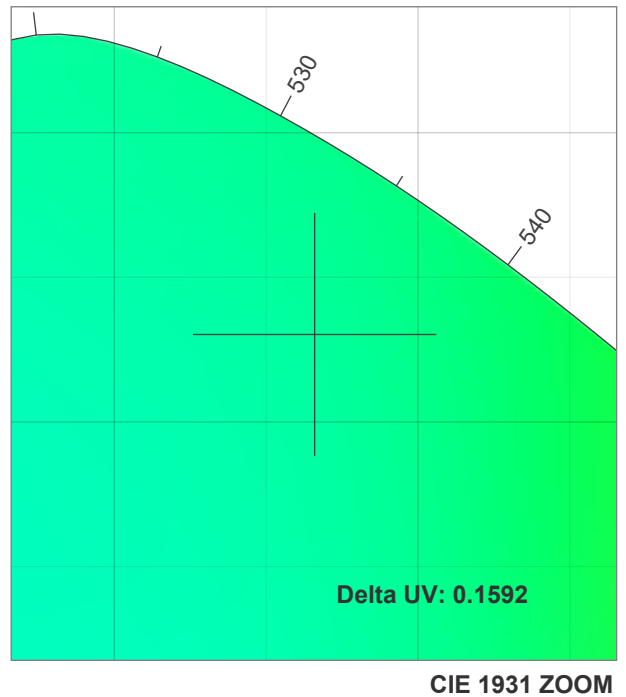

CRI: 0.0 (R1-R8)

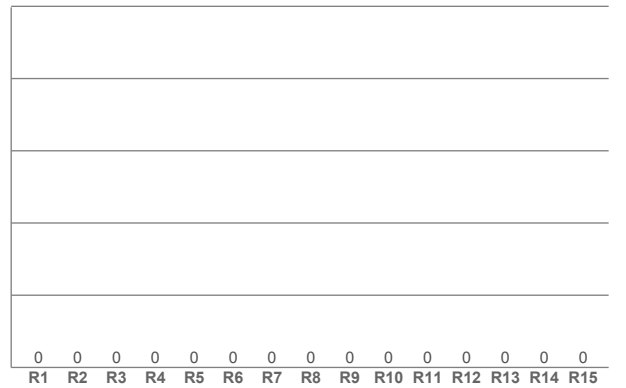


CQS: 0.0

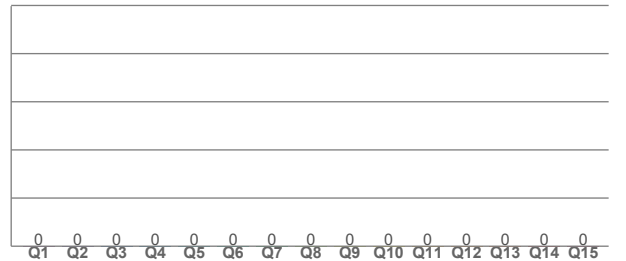

Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
0 K	0.0	0.0	0.0	0.0	0.0	0.2	0.7	0.1	0.4	NaN

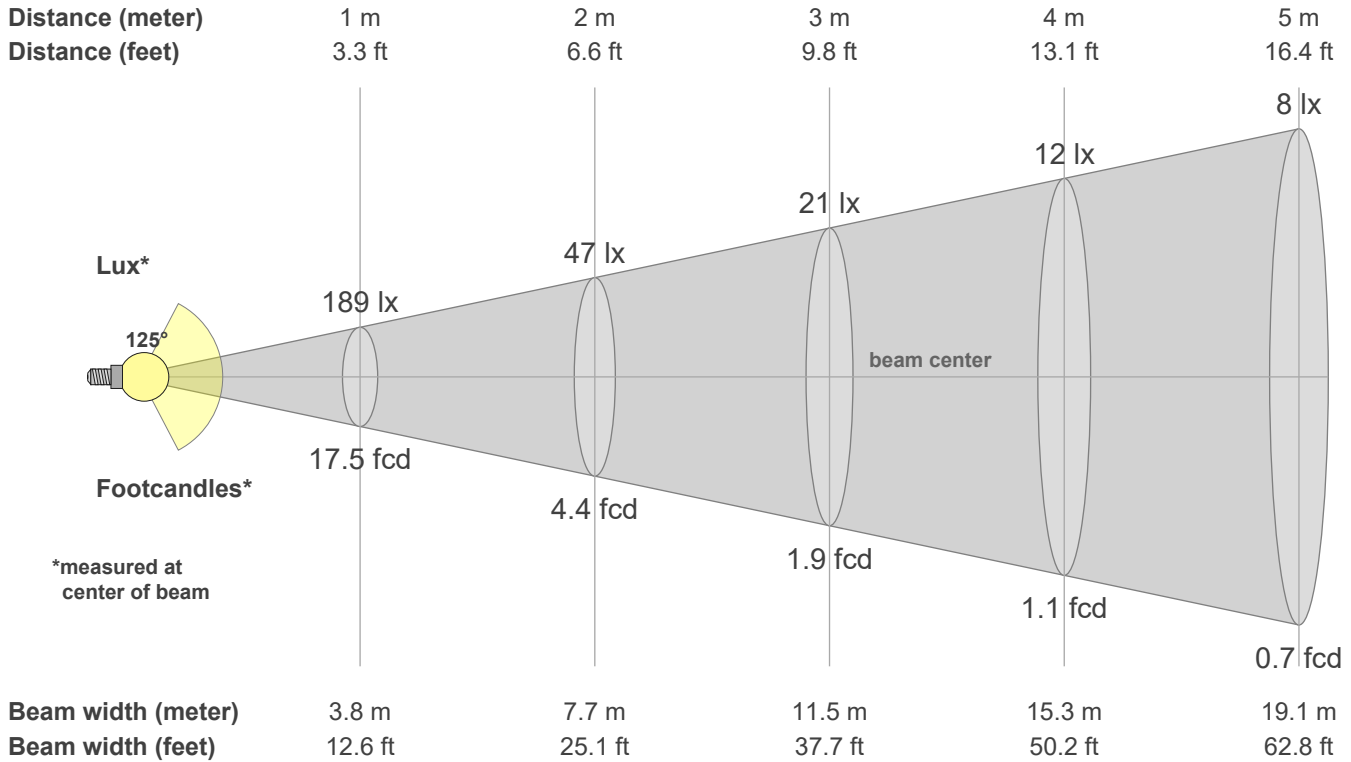

Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
189	187	181	172	159	143	125	105	85	66	49	36	27	21	17	15	12	10	6	4
100%	99%	96%	91%	84%	76%	66%	56%	45%	35%	26%	19%	14%	11%	9%	8%	6%	5%	3%	2%

Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
189	186	179	166	149	128	102	73	43	15	3	2	2	2	2	2	2	3	3	3
100%	98%	95%	88%	79%	68%	54%	39%	23%	8%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%

Intensities in 180° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
189	187	181	172	159	143	125	105	85	66	49	36	27	21	17	15	12	10	6	4
100%	99%	96%	91%	84%	76%	66%	56%	45%	35%	26%	19%	14%	11%	9%	8%	6%	5%	3%	2%

Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
189	186	179	166	149	128	102	73	43	15	3	2	2	2	2	2	2	3	3	3
100%	98%	95%	88%	79%	68%	54%	39%	23%	8%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2.5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
124.8°	203.6°	299.6°	62.5%	41.3%